




# Quad switcher box : CB -104S

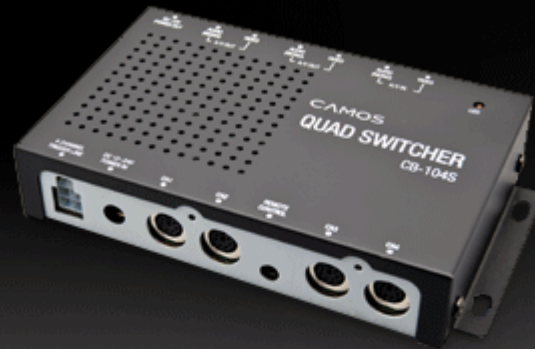

- Connecting max. 4 cameras and 1 A/V input
- User can choice split screen ( 2/ 3/ 4 / H Split screen )
- 4 of Trigger Line input
- Auto switching function
- MIRROR screen support for camera input
- NTSC/PAL (User can choice manually)

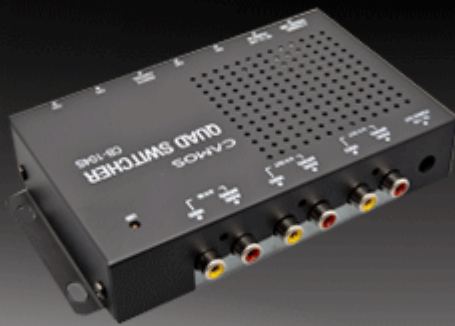

Power Supply	DC IN 12V~24V
Power Consumption	200mA (Set only)
Video In	RCA (1)
Camera In	6P miniDIN (4)
Monitor Out	RCA (2)
Audio Jack	RCA input (1), RCA output (1)
DC IN	DC power input terminal
DC OUT	DC power output terminal (Max.1A)
Remote Infrared LED	Max. 10m
Operating Temperature	0°C ~ 60°C
Storage Temperature	-10°C ~ 70°C
Material	SBHG
Dimension	140(W) x 30(H) x 90(D) mm (Including assembling parts : 160(W) mm)
Weight	380g

\* Design and specifications are subject to change without notice.